


# PVC-U Solvent welded metric fittings

## PVC-U Raccordi per incollaggio metrici

### SPIGOT MANICOTTO MASCHIO

Rev. Oct 2019

FN6369

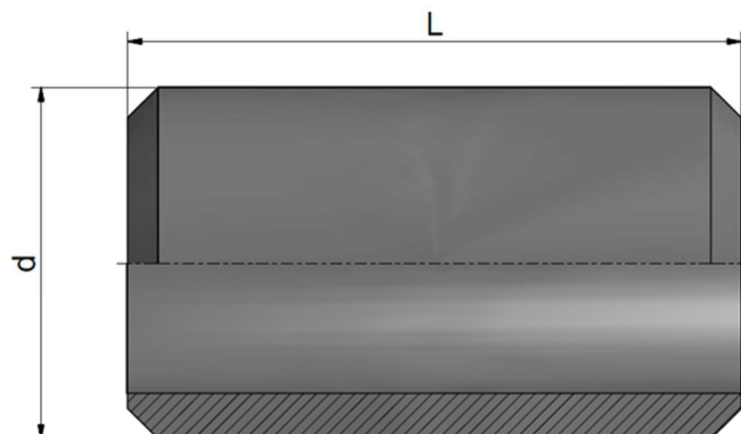

Code	d	L	PN	Weight (g)
RDRMAM0200	20	34	16	15
RDRMAM0250	25	40	16	23
RDRMAM0320	32	46	16	36
RDRMAM0400	40	53	16	60
RDRMAM0500	50	65	16	85
RDRMAM0630	63	79	16	115



NSF and WRAS certifications: only for valves with EPDM seals. Certifications and approvals are related to items declared on Official Listing or certificates. /  
 Certificazioni NSF e WRAS: valide solo per le valvole con guarnizioni EPDM. Le certificazioni si riferiscono ai prodotti dichiarati nelle Official Listing o sui certificati stessi.

All descriptions and illustrations in this publication are intended for guidance only and shall not constitute a 'sale by description'. All dimensions given are nominal, while changes can be done on the information, products and specifications from time to time for a variety of reasons, without prior notice. The information in this publication is provided 'as is' on the revision date stated on the sheet. Updates will not be issued automatically. This information is not intended to have any legal effect, whether by way of advice, representation or warranty (express or implied). We accept no liability whatsoever (to the extent permitted by law) if you place any reliance on this publication you must do so at your own risk. All rights reserved. Copyright in this publication belongs to Polypipe Italia and all such copyright may not be used, sold, copied or reproduced in whole or part in any manner in any media to any person without prior consent. **EFFAST** is a registered trademark."