


PVC-U Solvent welded metric fittings

PVC-U Raccordi per incollaggio metrici

HOSE ADAPTOR FLANGIA LIBERA EN/ISO/DIN

Rev. Jan 2020

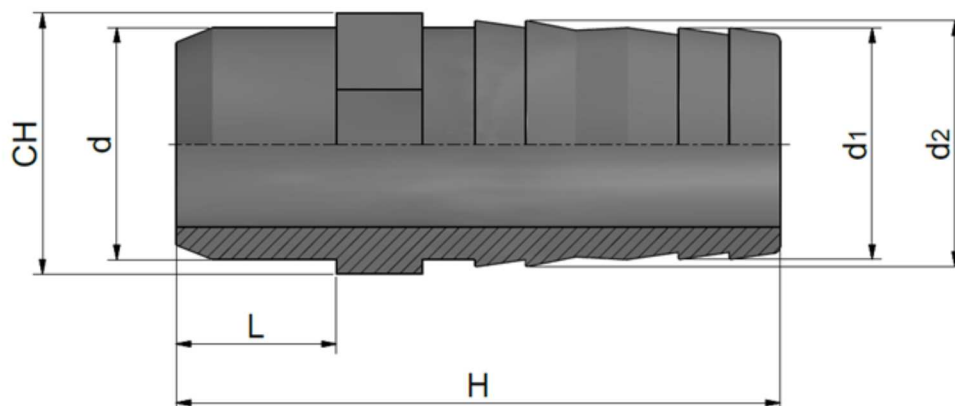

Code	d	d1	d2	L	H	CH	PN	Weight (g)
RDRPGD0120	12	12	14	12	56	-	16	6
RDRPGD0160	16	16	18	14	66	19	16	14
RDRPGD0200	20	20	22	16	70	24	16	20
RDRPGD0250	25	25	27	19	79	30	16	30
RDRPGD0320	32	30	32	22	83	36	16	47
RDRPGD0400	40	40	42	26	96	46	16	72
RDRPGD0500	50	50	52	31	108	55	16	135
RDRPGD0630	63	63	64	38	130	65	16	208



NSF and WRAS certifications: only for valves with EPDM seals. Certifications and approvals are related to items declared on Official Listing or certificates. /
Certificazioni NSF e WRAS: valide solo per le valvole con guarnizioni EPDM. Le certificazioni si riferiscono ai prodotti dichiarati nelle Official Listing o sui certificati stessi.

All descriptions and illustrations in this publication are intended for guidance only and shall not constitute a 'sale by description'. All dimensions given are nominal, while changes can be done on the information, products and specifications from time to time for a variety of reasons, without prior notice. The information in this publication is provided 'as is' on the revision date stated on the sheet. Updates will not be issued automatically. This information is not intended to have any legal effect, whether by way of advice, representation or warranty (express or implied). We accept no liability whatsoever (to the extent permitted by law) if you place any reliance on this publication you must do so at your own risk. All rights reserved. Copyright in this publication belongs to Polypipe Italia and all such copyright may not be used, sold, copied or reproduced in whole or part in any manner in any media to any person without prior consent. **EFFAST** is a registered trademark."