


**PVC-U Solvent welded metric fittings**  
**PVC-U Raccordi per incollaggio metrici**

**TEE 45°**  
**TI 45°**

Rev. Apr 2019

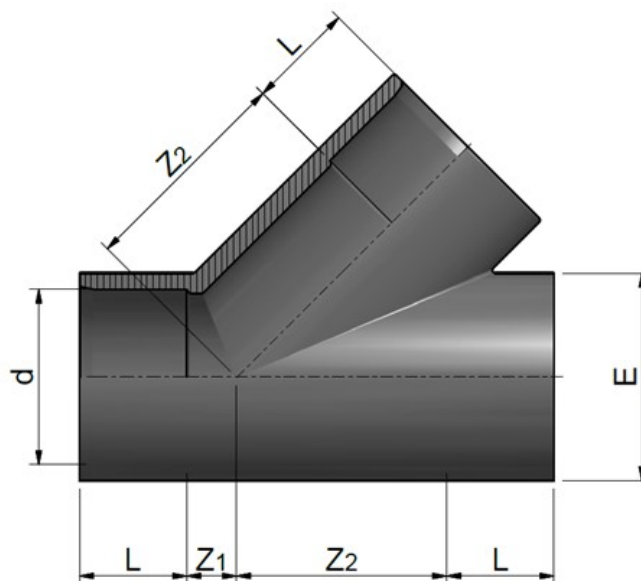

Code	d	L	Z1	Z2	E	PN	Weight (g)
RDRTYD0200	20	16	7	29	27,5	16	36
RDRTYD0250	25	19	7	36	33,5	16	59
RDRTYD0320	32	22	8	44	42	16	103
RDRTYD0400	40	26	10	54	51	16	125
RDRTYD0500	50	31	12	65	61	16	254
RDRTYD0630	63	38	14	80	74,5	16	420
RDRTYD0750	75	44	20	94	89	16	675
RDRTYD0900	90	51	21	113	106	10	1100
RDRTYD1100	110	61	23	143	129	10	1920
RDRTYD1600	160	86	35	200	189	10	6600

All descriptions and illustrations in this publication are intended for guidance only and shall not constitute a 'sale by description'. All dimensions given are nominal, while changes can be done on the information, products and specifications from time to time for a variety of reasons, without prior notice. The information in this publication is provided 'as is' on the revision date stated on the sheet. Updates will not be issued automatically. This information is not intended to have any legal effect, whether by way of advice, representation or warranty (express or implied). We accept no liability whatsoever (to the extent permitted by law) if you place any reliance on this publication you must do so at your own risk. All rights reserved. Copyright in this publication belongs to Polypipe Italia and all such copyright may not be used, sold, copied or reproduced in whole or part in any manner in any media to any person without prior consent. **EFFAST** is a registered trademark."